



12,5x25 - 4¹⁵/₁₆"x9¹³/₁₆"
138P3 Avana Nat. ● 60




6x25 - 2³/₈"x9¹³/₁₆"
068P3 Avana Nat. ● 60



12,5x25 - 4¹⁵/₁₆"x9¹³/₁₆"
138P8 Cenere Nat. ● 60




6x25 - 2³/₈"x9¹³/₁₆"
068P8 Cenere Nat. ● 60

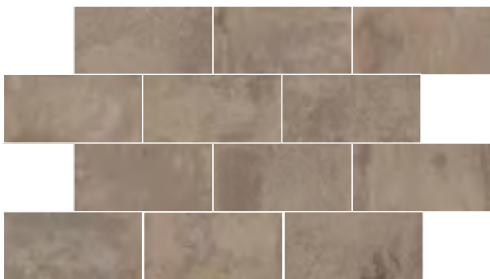


12,5x25 - 4¹⁵/₁₆"x9¹³/₁₆"
138P6 Terra Nat. ● 60




6x25 - 2³/₈"x9¹³/₁₆"
068P6 Terra Nat. ● 60

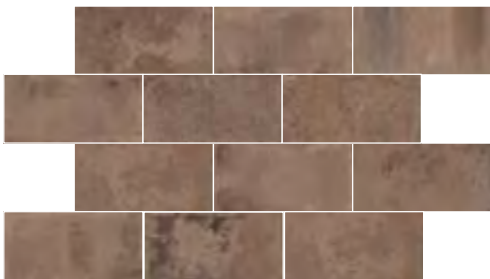


12,5x25 - 4¹⁵/₁₆"x9¹³/₁₆"
138P2 Mattone Nat. ● 60

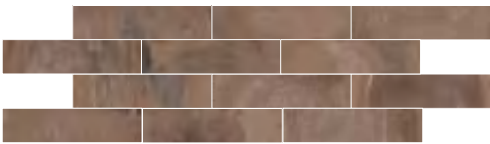


6x25 - 2³/₈"x9¹³/₁₆"
068P2 Mattone Nat. ● 60

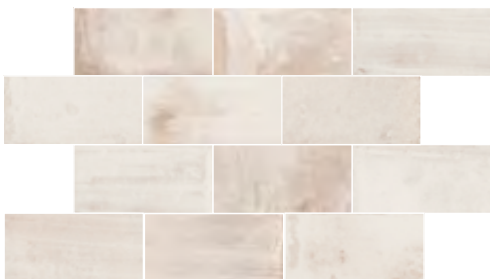

12,5x25 - 4¹⁵/₁₆"x9¹³/₁₆"
138P1 Calce Nat. ● 60

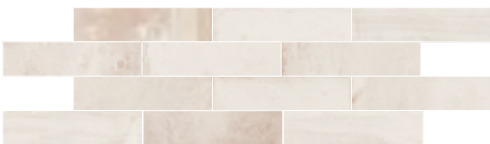

6x25 - 2³/₈"x9¹³/₁₆"
068P1 Calce Nat. ● 60

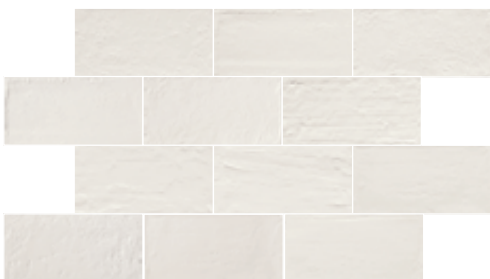

12,5x25 - 4¹⁵/₁₆"x9¹³/₁₆"
138P0 Gesso Nat. ● 60



6x25 - 2³/₈"x9¹³/₁₆"
068P0 Gesso Nat. ● 60

Brick 12,5x25 - 4¹⁵/₁₆"x9¹³/₁₆" / 6x25 - 2³/₈"x9¹³/₁₆"

POSA PAVIMENTO Si consiglia la posa con fuga 3 mm. **POSA RIVESTIMENTO** Si consiglia la posa con fuga 8 mm.
LAYING ON FLOOR Laying with a 3 mm-joint is recommended. **LAYING ON WALL** Laying with a 8 mm-joint is recommended.
POSE SUR SOL Pose recommandée avec joints de 3 mm. **POSE SUR REVÊTEMENT MURAL** Pose recommandée avec joints de 8 mm.

Brick 12,5x25 - 4¹⁵/₁₆"x9¹³/₁₆" / 6x25 - 2³/₈"x9¹³/₁₆"

ALS BODENBELAG Es wird eine Fugenbreite von 3 mm empfohlen. **ALS WANDVERKLEIDUNG** Es wird eine Fugenbreite von 8 mm empfohlen.
PAVIMENTO Se recomienda la colocación con juntas de 3 mm. **REVESTIMIENTO** Se recomienda la colocación con juntas de 8 mm.
НАСТИЛ ПОЛОВ Рекомендуется укладка с швом 3 мм. **ОБЛИЦОВКА СТЕН** Рекомендуется укладка с швом 8 мм.